





Bathroom strip equipped with an SMD LED plate
 Luminous efficiency of the complete system 90.2lm/W
 Maintenance of flow L70F10 >54000 hours (Ta25°C)
 Interchangeable white, gray or chrome tips provided
 Very effective and comfortable lighting for the eye
 Concealed fixing thanks to interchangeable tips
 Polycarbonate body and diffuser
 Wiring on the rear using a waterproof cable pass-through with domino

Mechanical Features

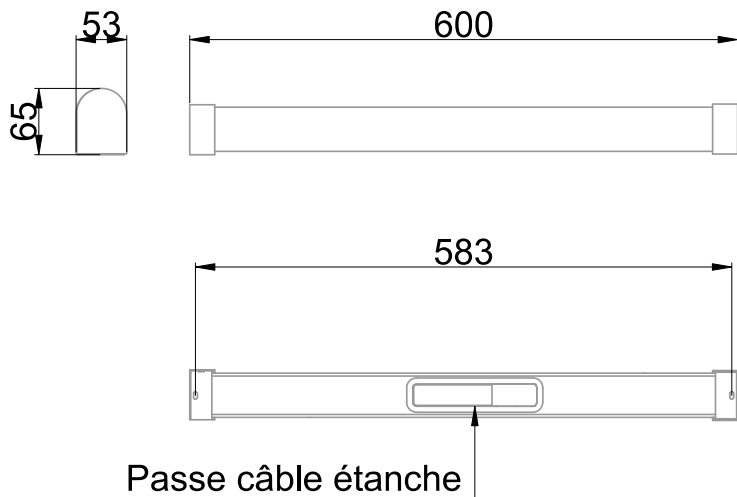

Electrical Features

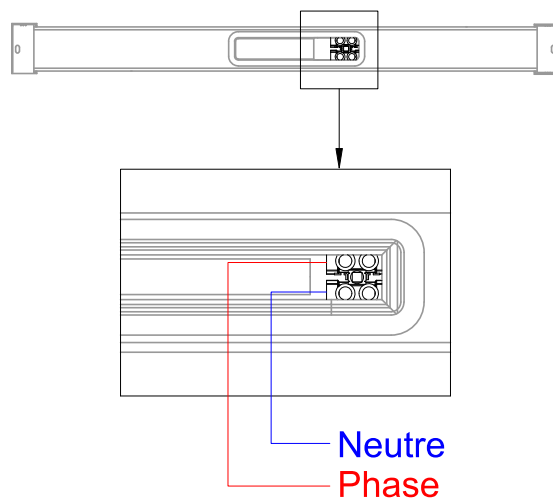


Colour	White			Voltage range	220-240V/50-60Hz		
Body	Polycarbonate			Luminaire wattage	15.3W		
Diffuser	Polycarbonate			Lamp wattage	13.9W		
Installation	Applied			Driver Output	93%		
Immersion	No			Number of lamps	1		
IP Wall Lamp	44	Incandescent wire T°	650°C	Ta min/max	-20°C/40°C		
Adjustability	Fixed	IK	08	Tc	85°C		
Luminaire weight	0.373kg	Luminaire length	600mm	Lamp supply	Constant current driver		
Luminaire width	53mm	Luminaire height	65mm	Input signals	AC		
Fixing dimensions				Ampere exit driver	150mA		
				Wattage factor/cosφ	0,53		
				Carbon footprint	1.37 gCO2/h		
					10A	16A	25A
				Luminaire number type B	30	48	74
				Luminaire number type C	50	82	124
				Short circuit protection	Yes	Overheat protection	Yes
				Overload protection	Yes		



Photometric Features

Colour Temperature	3000K
Lamp type	LED module
Luminous efficiency excluding power supply	99lm/W
Output flow to 25°C Ta	1380lm
Lighting efficiency for the whole product	90.19lm/W
Light output (LOR)	100%
Light emission	Direct/Symetrical
Beam angle	156°
Diffuser	Opalescent
CRI	>80
Photobiological risk	Risk group 0
Number of MacAdam's ellipses	6 SDCM
LM80	L70F10 > 54000h (Ta25°C)
SVM	<0.9
PstLm	0.013

This fixture is not suitable for accent lighting.

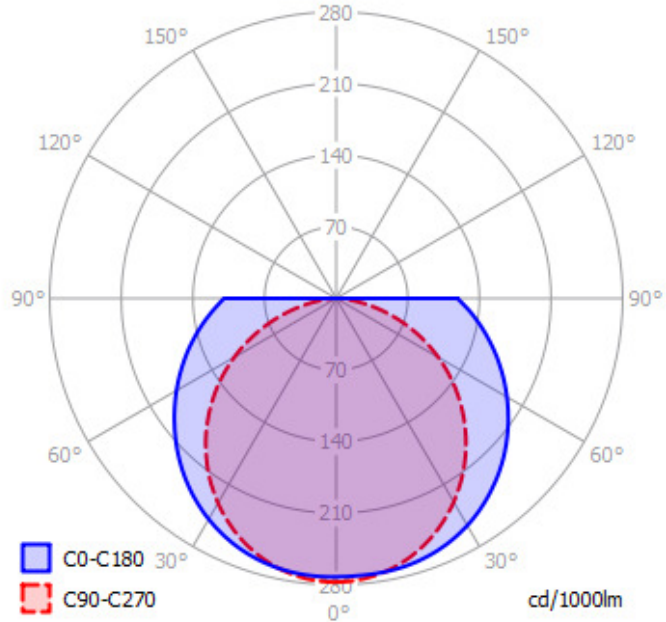

This product contains an energy efficient light source

F

Normative Features

PEP	Availability upon request
-----	---------------------------

The technical features can be changed by RESISTEX without notice. Information subjected to error.