





Industrial pendant light equipped with SMD LED plate
Luminous efficiency of the complete system 131lm/W
Maintenance of L80B10 flux at 104,000 hours (Ta25°C)
Interior design lighting
Polycarbonate body and diffuser
Ideal for lighting commercial areas, hotels, art and culture spaces...
Optimal uniformity thanks to its 360 beam angle°
Constant current driver

Mechanical Features

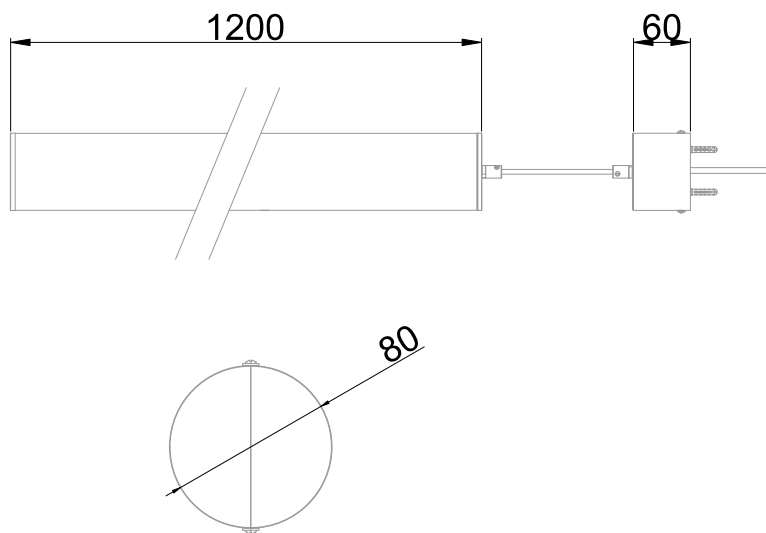

Electrical Features

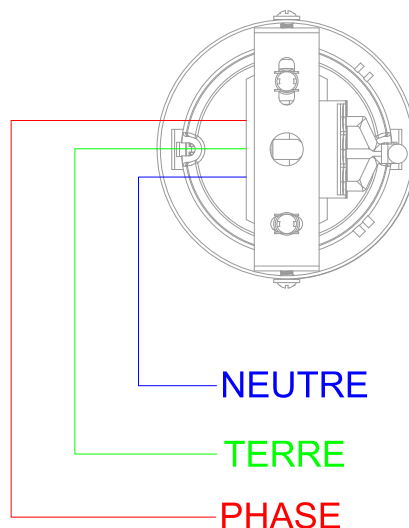

Colour	White		
Body	Polycarbonate		
Diffuser	Polycarbonate		
Installation	Suspension		
Immersion	No		
IP Suspension	40	Incandescent wire T°	850°C
Adjustability	Fixed	IK	08
Luminaire diameter	80mm	Luminaire length	1200mm

Voltage range	220-240V
Luminaire wattage	26.2W
Ta min/max	-20°C/40°C
Lamp supply	Constant current driver
Input signals	AC
Carbon footprint	2.35 gCO ₂ /h

Min suspension height	300mm
-----------------------	-------



