





Decorative lighting equipped with LED plate
 Light efficiency of the complete system 149lm/W
 Maintenance of L80F10 flow greater than 70,000 hours (Ta25°C)
 Aluminum body and polycarbonate diffuser
 Ceiling position with kit 601721
 Suspended position with kit 601722
 High quality finish
 Wiring from above the luminaire

Mechanical Features

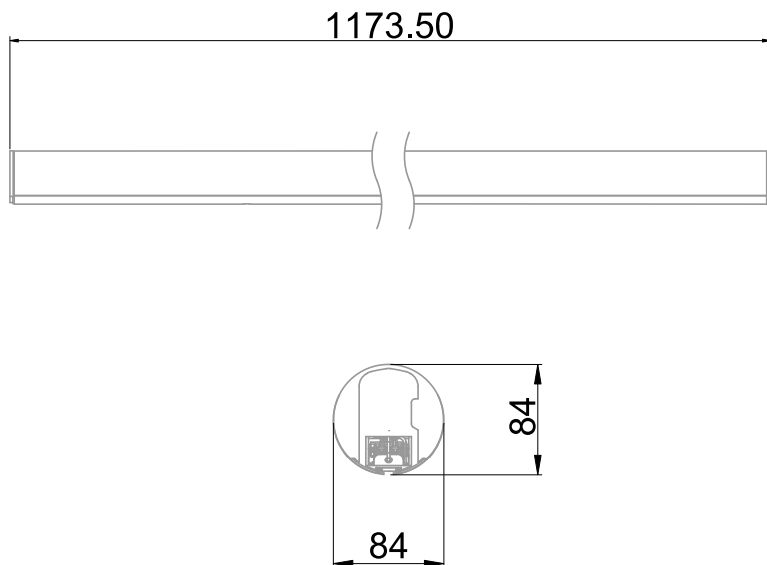

Electrical Features

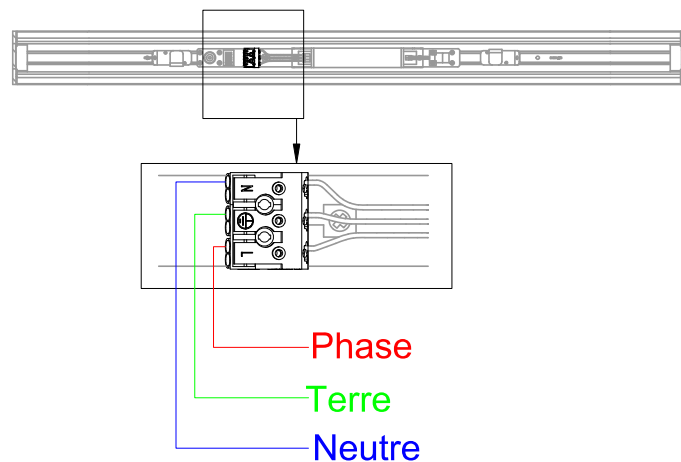

Colour	White		
Body	Aluminum		
Diffuser	Polycarbonate		
Installation	Ceiling light/Suspension		
Immersion	No		
IP Ceiling light	40	IP Suspension	40
Adjustability	Fixed	Incandescent wire T°	650°C
Luminaire weight	1.69kg	IK	08
Luminaire diameter	84mm	Luminaire length	1188mm

Voltage range	220-240V/50-60Hz		
Luminaire wattage	37.6W		
Lamp wattage	33.5W		
Number of lamps	1		
Ta min/max	-20°C/40°C		
Tc	85°C		
Lamp supply	Constant current driver		
Input signals	AC		
Driver output tension	33V		
Ampere exit driver	1000mA		
Carbon footprint	3.38 gCO2/h		

Min suspension height	300mm
Min suspension height	1200mm

	10A	16A	25A
Luminaire number type B	13	20	35
Luminaire number type C	21	35	55


Short circuit protection	Yes	Overheat protection	Yes
Overload protection	Yes	Protection surtension	Yes
Leakage current	<0.7mA		
Harmonic distortion rate	<20		



Photometric Features

Colour Temperature	4000K
Lamp type	LED module
Luminous efficiency excluding power supply	167lm/W
Lighting efficiency for the whole product	149lm/W
Light output (LOR)	100%
Light emission	Direct/Symetrical
Beam angle	270°
Diffuser	Opalescent
CRI	>80
Photobiological risk	Risk group 0
Number of MacAdam's ellipses	<3 SDCM
4000K coordinates	x : 0.3765; y : 0.3765
UGR type	<25
LM80	L80F10 > 70000h (Ta25°C)
CIE flux code n°3 (%)	83%
ULR	29%
SVM	0.4
PstLm	<1

This fixture is not suitable for accent lighting.

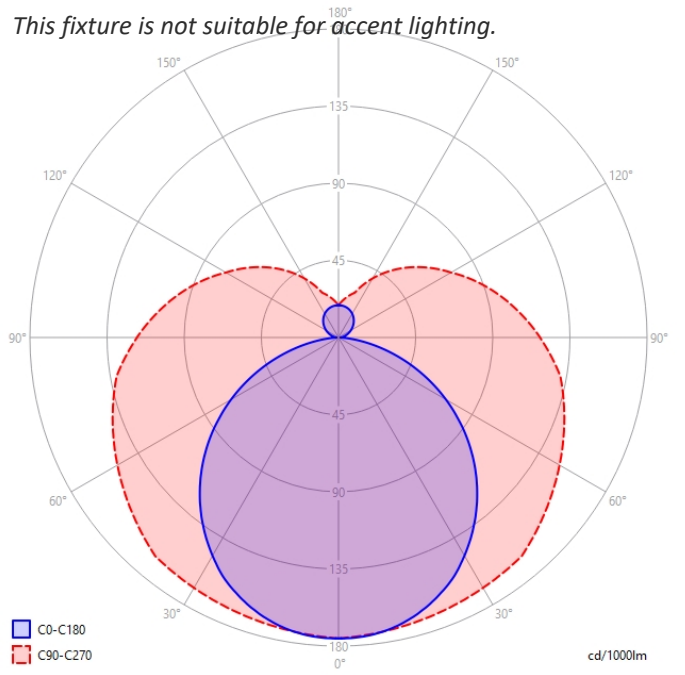

Normative Features

Certificate of energy saving	BAT-EQ-127	PEP	Availability upon request
------------------------------	------------	-----	---------------------------

The technical features can be changed by RESISTEX without notice. Information subjected to error.