





Tertiary recessed fitting with an LED plate
 Luminous efficiency of the complete system 94lm/W
 Maintenance of L80F10 flow greater than 54,000 hours (Ta25°C)
 Steel tee body and phenylethylene diffuser
 Very homogeneous, efficient and pleasing to the eye lighting
 Recessed false ceiling mounting type BA13 with accessory 621435
 Ceiling mounting with accessory 621433
 Integrated constant current driver

Mechanical Features

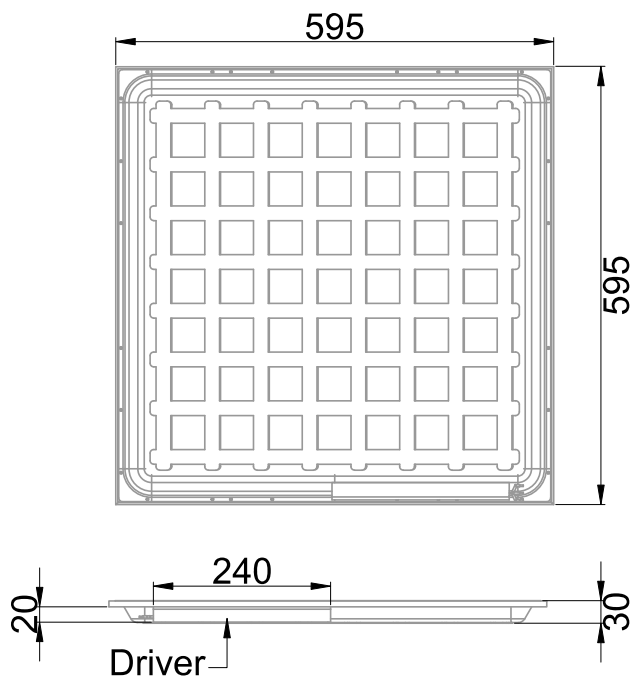

Electrical Features

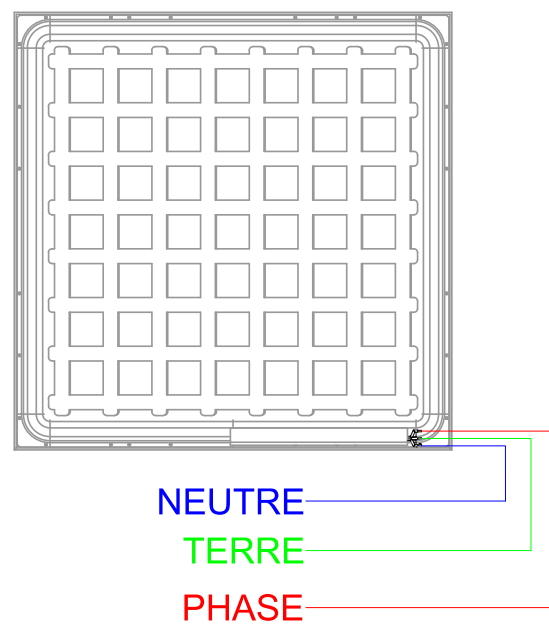

Colour	White		
Body	The steel		
Diffuser	phenylethylene		
Installation	Ceiling recessed/Ceiling light		
Immersion	No	Recoverable	No
IP Recessed	40	Incandescent wire T°	650°C
Adjustability	Fixed	IK	04
Luminaire weight	1.063kg	Luminaire length	595mm
Luminaire width	595mm	Luminaire height	30mm
Cutting length	600mm		


Cutting width 600mm

Voltage range	220-240V/50-60Hz		
Luminaire wattage	41.8W		
Number of lamps	1		
Ta min/max	-15°C/40°C		
Tc	80°C		
Lamp supply	Constant current driver		
Input signals	AC		
Driver output tension	72-190V		
Ampere exit driver	250mA		
Wattage factor/cosφ	0,98		
Carbon footprint	3.76 gCO2/h		
Short circuit protection	Yes	Overheat protection	Yes
Overload protection	Yes		
Switching cycles	15000		
Leakage current	<2mA		
Harmonic distortion rate	<20%		



Photometric Features

Colour Temperature	4000K
Lamp type	LED module
Output flow to 25°C Ta	3930lm
Lighting efficiency for the whole product	94lm/W
Light output (LOR)	100%
Light emission	Direct/Symetrical
Beam angle	115°
Diffuser	Opalescent
CRI	83
Photobiological risk	Risk group 0
Number of MacAdam's ellipses	3 SDCM
4000K coordinates	x : 0.3810; y : 0.3770
UGR type	<19
LM80	L80F10 >54000h (Ta25°C)
CIE flux code n°3 (%)	94%
ULR	3%
SVM	<0.9
PstLm	<1

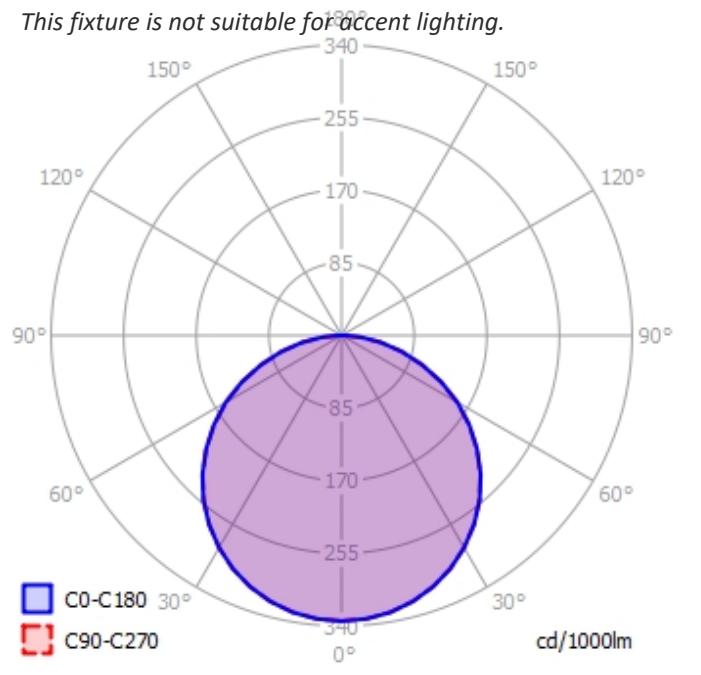

This product contains an energy efficient light source

E

Normative Features

PEP	Availability upon request
-----	---------------------------