



Projector equipped with an LED board (EAN13 : 3168107790112)

Light efficiency of the complete system 148lm/W

Maintenance of L90F10 flux greater than 100,000 hours (Ta25°C)

Three adjustment levels: 100W (151lm/W) / 120W (148lm/W) / 150W (144lm/W)



Die-cast aluminum body promoting passive cooling with anti-UV treatment

Translucent tempered glass diffuser

Driver integrated directly into the luminaire

70cm output cable

Electrical Features

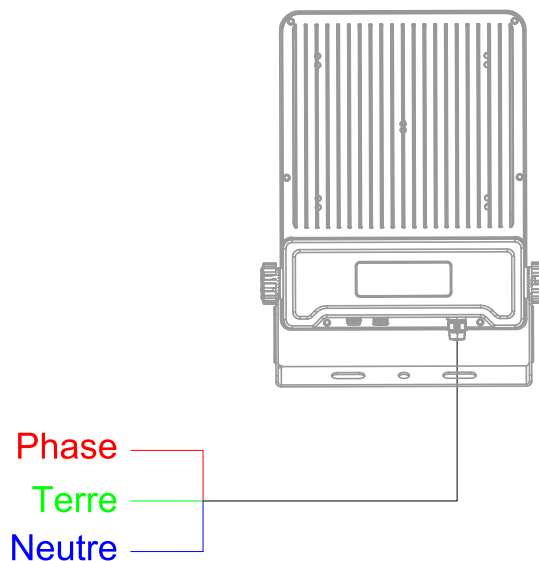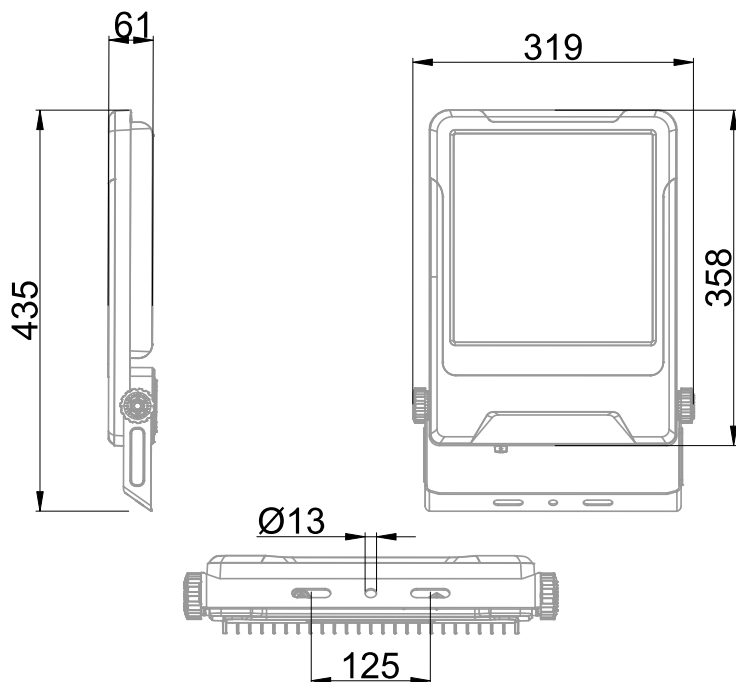


Voltage range	220-240V/50-60Hz		
Luminaire wattage	121W		
Number of lamps	1		
Ta min/max	-40°C/80°C		
Lamp supply	Constant current driver		
Input signals	AC		
Carbon footprint	10.89 gCO2/h		
	10A	16A	25A
Luminaire number type B	3	6	9
Luminaire number type C	6	10	15
Short circuit protection	Yes	Overheat protection	Yes
Overload protection	Yes	Protection surtension	Yes



Photometric Features

Colour Temperature	3000K
Lamp type	LED module
Output flow to 25°C Ta	17992lm
Lighting efficiency for the whole product	148.69lm/W
Light output (LOR)	100%
Light emission	Direct/Symetrical
Beam angle	90°
Diffuser	Translucent
Photobiological risk	Risk group 0
Maintaining flow	L90F10 > 100 000h (Ta25°C)
CIE flux code n°3 (%)	99%
ULR	1%
SVM	0.005
PstLm	0.032

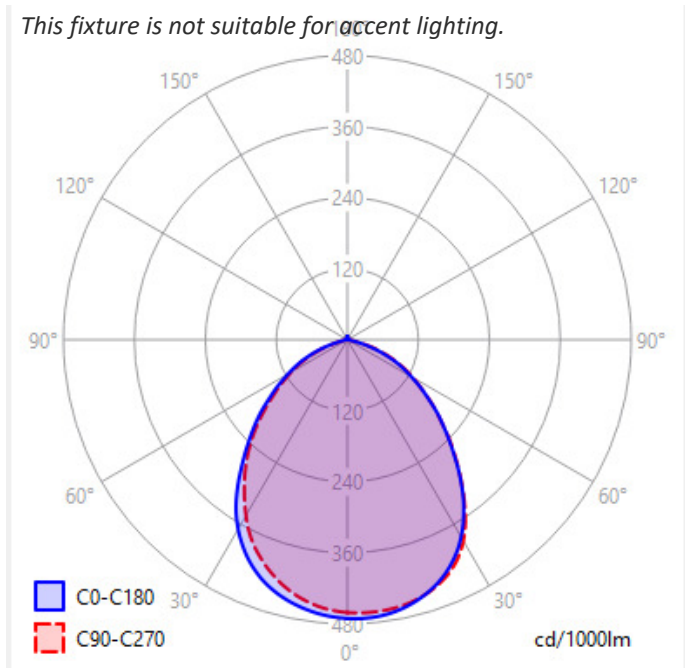

This product contains an energy efficient light source

C

Normative Features

Certificate of energy saving	BAT-EQ-127 / RES-EC-104	PEP	Availability upon request
------------------------------	-------------------------	-----	---------------------------