



Projector equipped with an LED board (EAN13 : 3168107790129)

Luminous efficiency of the complete system 144lm/W

Maintenance of L90F10 flux greater than 100,000 hours (Ta25°C)

Three adjustment levels: 200W (154lm/w) / 240W (150lm/w) / 300W (145lm/w)


Die-cast aluminum body promoting passive cooling with anti-UV treatment

Translucent tempered glass diffuser

Ideal for lighting stadiums, tunnels, bridges, airports, amusement parks, etc.


70cm output cable

Mechanical Features

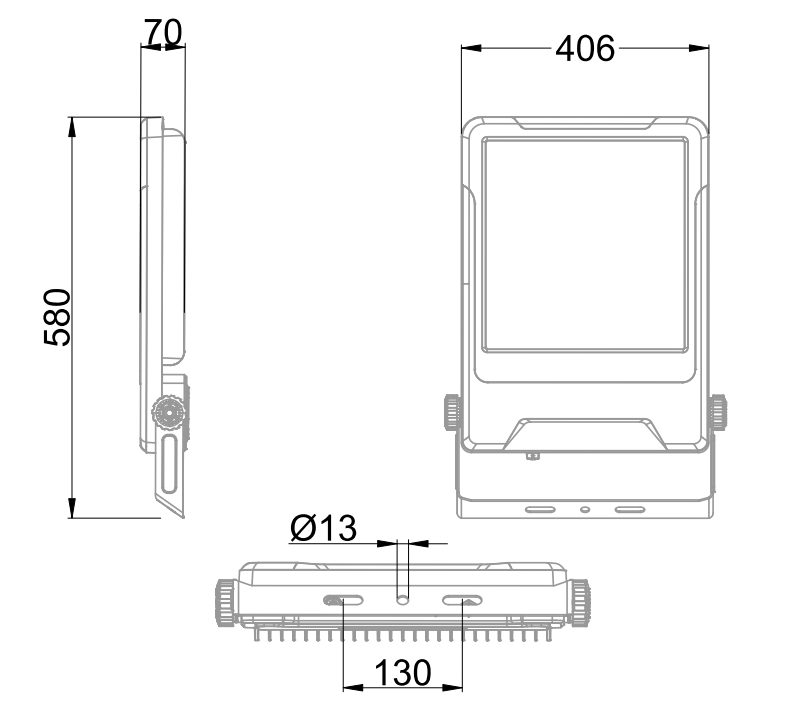

Colour	Black		
Body	Aluminum die cast		
Diffuser	Glass		
Installation	Applied		
Immersion	No	Recoverable	No
IP Wall Lamp	65	Incandescent wire T°	650°C
Adjustability	Adjustable	IK	08
Luminaire width	406mm	Luminaire length	580mm
		Luminaire height	70mm
Fixing dimensions		1303mm	

Electrical Features

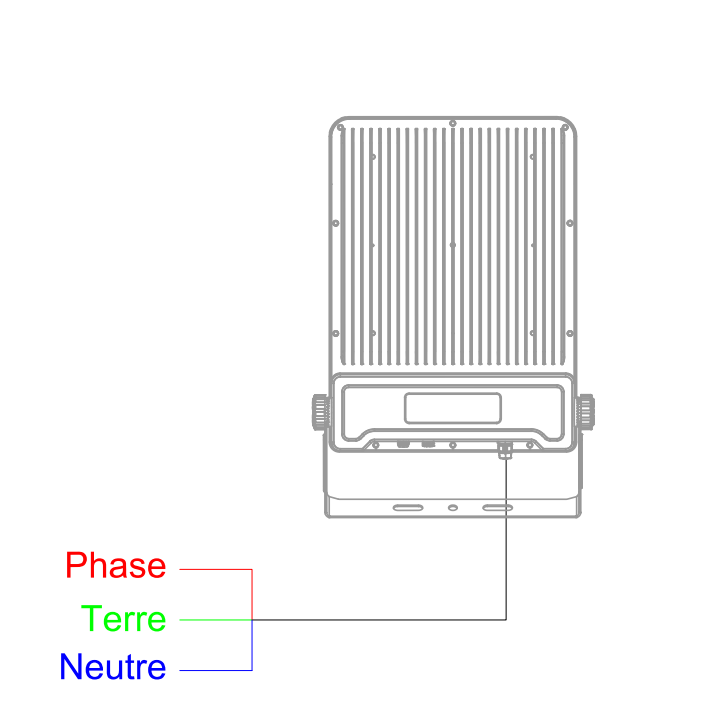


Voltage range	220-240V/50-60Hz		
Luminaire wattage	236.4W		
Number of lamps	1		
Ta min/max	-40°C/80°C		
Lamp supply	Constant current driver		
Input signals	AC		
Driver output tension	180-260V		
Carbon footprint	21.27 gCO2/h		
Luminaire number type	10A	16A	25A
	2	3	5
Luminaire number type C	3	5	8
Leakage current	<0.75mA		

Photometric Features

Colour Temperature	3000K
Lamp type	LED module
Output flow to 25°C Ta	34235lm
Lighting efficiency for the whole product	144.81lm/W
Light output (LOR)	100%
Light emission	Direct/Symetrical
Beam angle	91°
Diffuser	Translucent
Photobiological risk	Risk group 0
LM80	L90F10 > 100 000h (Ta25°C)
CIE flux code n°3 (%)	100%
ULR	1%
SVM	0.01
PstLm	0.022

This fixture is not suitable for accent lighting.

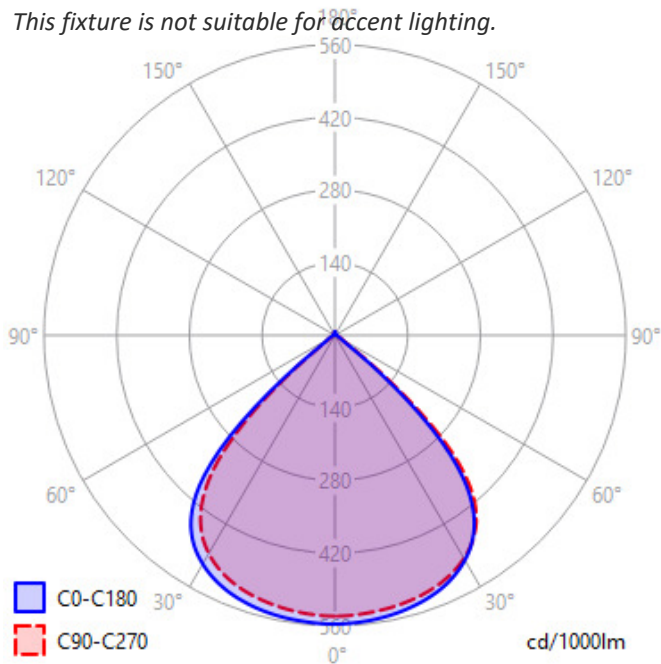

This product contains an energy efficient light source

C

Normative Features

Certificate of energy saving	BAT-EQ-127 / RES-EC-104	PEP	Availability upon request
------------------------------	-------------------------	-----	---------------------------

The technical features can be changed by RESISTEX without notice. Information subjected to error.