





Bulkhead equipped with an LED board
Light efficiency of the complete system 109lm/W
Maintenance of L70F10 flux greater than 54,000 hours (Ta25 C)
UV treated polycarbonate body
Opalescent polycarbonate diffuser
Possibility of choosing the color temperature (3000K / 4000K / 6000K)
Direct insertion push terminal block, double bridging line (section 1.5/2.5mm²)
Possibility of adding a kit of 4 anti-vandal screws (903061)

Mechanical Features

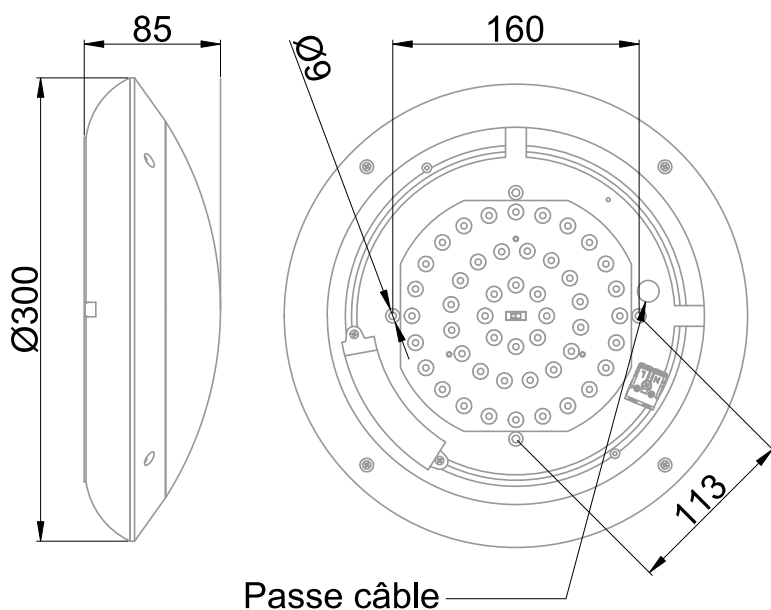

Electrical Features

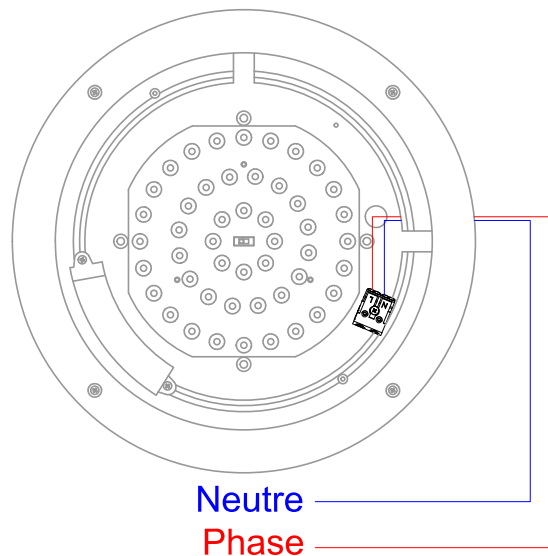

Colour	White		
Body	Polycarbonate		
Diffuser	Polycarbonate		
Installation	Ceiling light/Applied		
Immersion	No		
IP Ceiling light	66	IP Wall Lamp	66
Adjustability	Fixed	Incandescent wire T°	650°C
Luminaire weight	0.626kg	IK	10
Luminaire diameter	300mm	Luminaire height	85mm

Voltage range	220-240V/50-60Hz		
Luminaire wattage	16.7W		
Lamp wattage	15.5W		
Number of lamps	1		
Ta min/max	-20°C/45°C		
Tc	70°C		
Lamp supply	Constant current driver		
Input signals	AC		
Driver output tension	68V		
Ampere exit driver	240mA		
Wattage factor/cosφ	0,94		
Carbon footprint	1.5 gCO ₂ /h		

Fixing dimensions 113mm

	10A	16A	25A
Luminaire number type B	25	40	62
Luminaire number type C	41	66	104

Short circuit protection	Yes	Overheat protection	Yes
Overload protection	Yes		
Switching cycles	25000		
Leakage current	<5mA		



